


# light

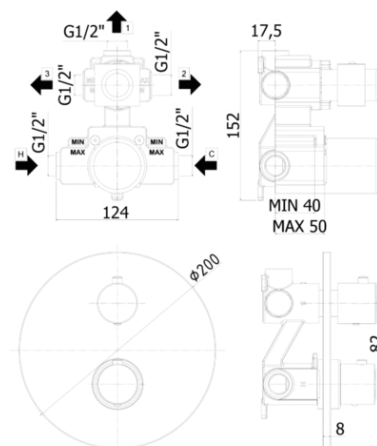

## DESCRIZIONE | DESCRIPTION

- Miscelatore termostatico incasso doccia (3 uscite) completo di:
  - piastra in metallo Ø200mm
  - attacchi 1/2"G
- Concealed thermostatic shower mixer (3 outlets) complete with:
  - metal wall plate Ø200mm
  - 1/2"G connections

## FINITURE | FINISHES

### LIQ 019

- CR- Cromo | Chrome
- BO- Bianco opaco | Matt white
- NO- Nero opaco | Matt black
- HG- Honey gold | Honey gold finish
- HGSP- Honey gold spazzolato | Brushed honey gold finish
- ST- Steel looking | Steel looking finish

### ZPRO 075

- CR- Cromo
- BO- Bianco opaco
- NO- Nero opaco
- HG- Honey gold
- HGSP- Honey gold spazzolato
- ST- Steel looking

## ARTICOLO | ARTICLE

### LIQ 019..

- con cartuccia deviatore (3 uscite + 3 posizioni intermedie con stop)
- with diverter cartridge (3 outlets + 3 stop intermediate positions)

### ZPRO 075..

- Prolunga per artt. 013-018-019-513-518-519
- H20mm

## RAPPORTO PROVA PORTATA | FLOW RATE REPORT

		Pressione / Pressure ( bar )									
		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate ( l / min )	uscita sopra - up outlet	6.2	9.4	11.7	13.7	15.8	17.4	19	20.3	21.7	22.8
	uscita destra - right outlet	6.48	9.66	12.07	14.08	15.9	17.5	19.06	20.47	21.79	22.98
	uscita sinistra - left outlet	6.31	9.47	11.75	13.78	15.94	17.68	19.16	20.41	21.83	23

## DOCUMENTI TECNICI | TECHNICAL DOCUMENTS



DIAGRAMMA  
PORTATA 1



ISTRUZIONI  
INSTALLAZIONE



ESPLOSO  
RICAMBI  
LIQ 019



Sito Web



www.paffoni.it