


compact box

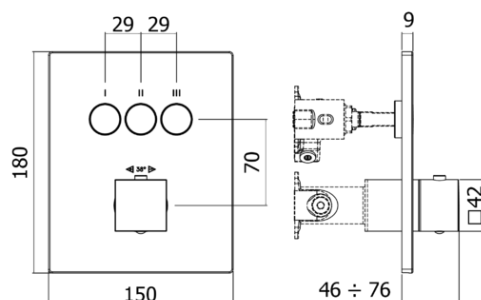

DESCRIZIONE | DESCRIPTION

- Set esterno termostatico incasso doccia (3 funzioni) completo di:
 - corpo termostatico (con cartuccia termostatica)
 - piastra quadra in metallo 150x180mm
 - manopola quadra
- External set for concealed thermostatic shower mixer (3 functions) complete with:
 - thermostatic mixer body (with thermostatic cartridge)
 - square metal wall plate 150x180mm
 - square handle

FINITURE | FINISHES

CPT 519

- CR- Cromo | Chrome
- BO- Bianco opaco | Matt white
- NO- Nero opaco | Matt black
- ST- Steel looking | Steel looking finish

ZPRO 093 . .

- CR- Cromo
- BO- Bianco opaco
- NO- Nero opaco
- ST- Steel looking

ARTICOLO | ARTICLE

CPT 519..

- con deviatore a pulsante On/Off
- 3 funzioni
- with push diverter On/Off
- 3 functions

ZPRO 093 . .

- Prolunga per artt. CPT 013-018-019-513-518-519
- H20mm

RAPPORTO PROVA PORTATA | FLOW RATE REPORT

		Pressione / Pressure (bar)												
		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5			
Portata / Flow rate (l / min)	Uscita outlet													
	1 uscita - outlet	8.2	12.7	16	18.5	20.6	22.6	24.2	25.9	27.5	29			
	2 uscita - outlet	9.5	14	17.3	20	22.4	24.5	26.4	28.3	30	31.6			
	3 uscita - outlet	8.2	12.7	16	18.5	20.6	22.6	24.2	25.9	27.5	29			
	1+2 uscita - outlet	10.6	16.3	20.4	23.9	27	29.6	31.9	34.1	36.3	38.1			
	1+3 uscita - outlet	10.2	15.3	20.1	23.4	26.1	28.7	30.9	33	34.8	36.4			
	2+3 uscita - outlet	10.6	16.3	20.4	23.9	27	29.6	31.9	34.1	36.3	38.1			
1+2+3 uscita - outlet	11.3	16.9	21.2	24.7	27.8	30.5	33	35.5	37.5	39.6				



DOCUMENTI TECNICI | TECHNICAL DOCUMENTS



DIAGRAMMA
PORTATA 1



ISTRUZIONI
INSTALLAZIONE



ESPLOSO
RICAMBI
CPT 519



Sito Web



www.paffoni.it